



## Double Mini Magnet

- Operating voltage 12~24Vdc (Selectable)
- Holding force up to 2 x 600lbs (272Kg)
- Aluminium housing
- Electroless Nickel Plated Armature
- Door status: An independent contact that works separately from the magnet to show door status not lock status
- Status LED • Red • Green

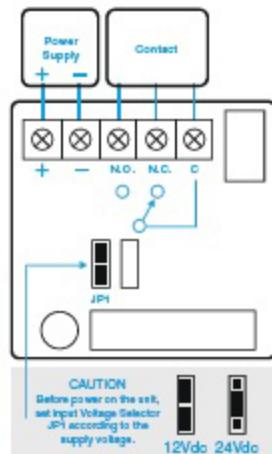

### OPTIONS

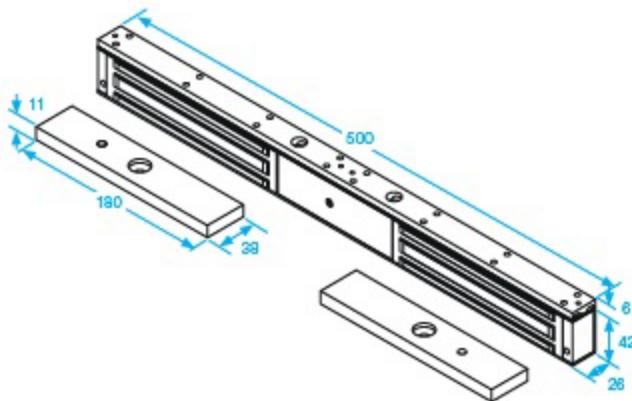

### SPECIFICATION

- Voltage tolerance: ±10%.
- Current draw: 480mA at 12Vdc, 240mA at 24Vdc (at temperature 20°C).
- Operating temperature: -10~55°C (14 to 131°F).
- Lock's surface temperature: Current temperature ±20% (when power is on).
- Humidity: 0~95% non-condensing.
- Weight: 3.7kg (approx).